




AUTO REVERS

FEATURES


- Wall and ceiling mounting
- Low-noise impeller
- Easy maintenance
- Continuous operation
- Automatic shutters
- Reliable DC motor (12 V) with low energy demand
- Supplied with a three bottom control unit and 220 V - 12 V transformer
- 5 year warranty

CONTROL

- Manual:
Three bottom control unit (included into delivery set):

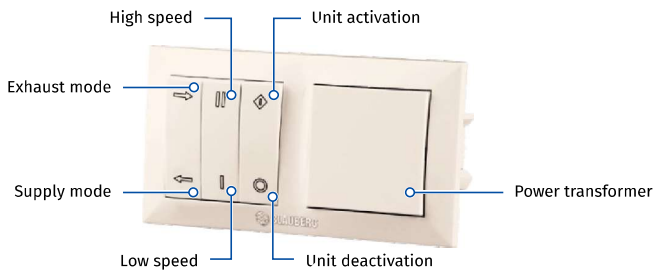


OVERALL DIMENSIONS AND MOUNTING

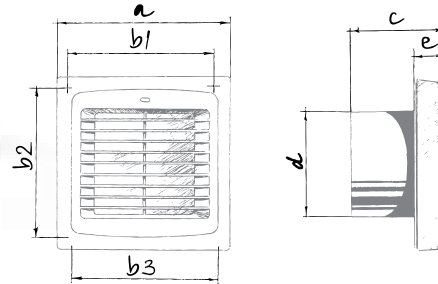

Dimensions [mm]	a	b1	b2	b3	c	Ød	e
Auto Revers 150	212	150	195	196	114	150	33

- Fan is designed for indoor mounting on the external wall and is connected to the air duct.
- Fixation to the wall or ceiling with screws. Flexible air duct is connected to exhaust flange with a clamp.

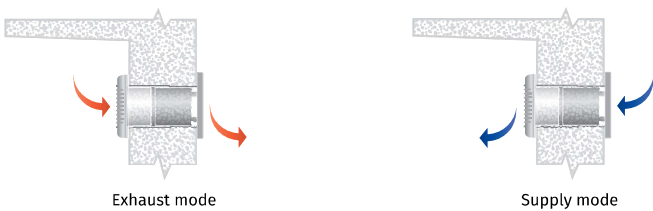

SPECIFICATIONS

Auto Revers 150	Exhaust Mode		Supply Mode	
	min	max	min	max
Speed				
Voltage [V / Hz]	220-240/50		220-240/50	
Power [W]	5.2	8.7	5.1	7.6
Current [A]	0.025	0.045	0.025	0.045
RPM [min ⁻¹]	1215	1950	1210	2030
Air flow [m ³ /h (l/s)]	123 (34)	202 (56)	110 (31)	187 (52)
SFP [W/l/s]	0.15	0.16	0.17	0.15
Noise level [dBA]	28	33	26	32

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

