



Tubo 100 Tubo 125 Tubo 150

APPLICATION

- Long Continuous / periodic supply / exhaust ventilation of bathroom, showers, kitchens and other utility spaces.
- **Best suitable application is for fresh air supply in cassette units.**
- Ventilation shaft mounting or duct connection.
- Low to medium air flow motion for short distances at low air resistance.
- Compatible with Ø 100, 125 and 150 mm air ducts.

USED AT



- Residential premises
- Offices
- Trade premises
- Job sites
- Child care facilities
- Flats, cottages
- Utility spaces
- Restaurants
- Health care facilities

MOTOR


- Reliable and low-watt electric ball bearing motor.
- Designed for continuous operation and requires no maintenance.
- Equipped with overheating protection.

OPTIONS

- Pull-cord switch
- Timer
- Time delay range from 2 to 30 min

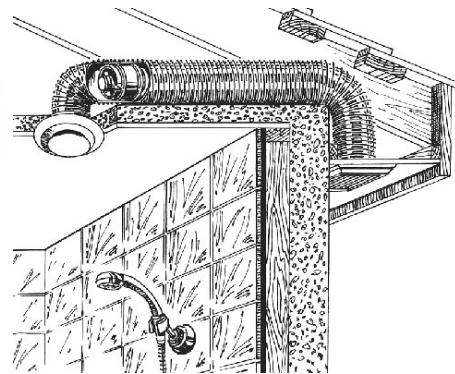


OVERALL AND MOUNTING DIMENSIONS

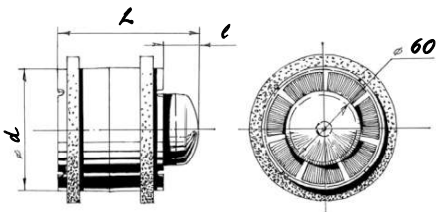

Dimensions [mm]	d	L	l
Tubo 100	99	120	28
Tubo 125	123.5	118	28
Tubo 150	149.5	128	28

SPECIFICATIONS

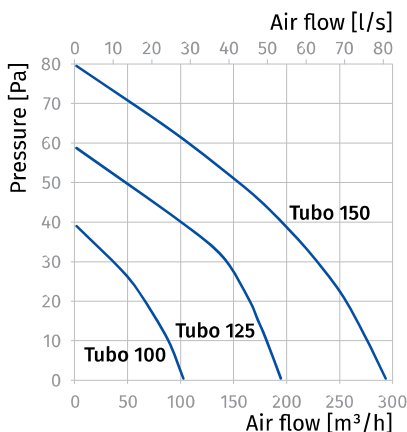

Model	Tubo 100	Tubo 125	Tubo 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	30
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m³/h (l/s)]	102 (28)	195 (54)	295 (82)
SFP [W/l/s]	0.5	0.3	0.37
Sound pressure level at 3m [dBA]	38	39	40

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

