



Quatro 100 - 125 - 150



APPLICATION

- Long Continuous / periodic exhaust ventilation of bathroom, showers, kitchens and other utility spaces.
- Ventilation shaft mounting or duct connection.
- Low to medium air flow motion for short distances at low air resistance.
- Compatible with Ø 100, 125 and 150 mm air ducts.


USED AT

- Residential premises
- Offices
- Trade premises
- Job sites
- Child care facilities
- Flats, cottages
- Utility spaces
- Restaurants
- Health care facilities

DESIGN FEATURES

- Modern design with aesthetic look.
- The casing, impeller and front panel are made of high-quality durable ABS plastic, UV resistant.
- Various decorative front plates metallic (Quatro Platinum), aluminum (Quatro Hi-Tech), chrome (Quatro Chrome), gold (Quatro Gold).
- The intellectual impeller design makes the fan efficiency high and the service life long.
- The fan is equipped with a specially designed back valve to prevent back flow.
- Motor Protection rating IP 34.

OVERALL AND MOUNTING DIMENSIONS

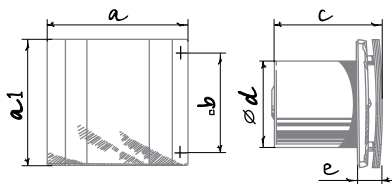

MOTOR


- Reliable and low-watt electric ball bearing motor.
- Designed for continuous operation and requires no maintenance.
- Equipped with overheating protection.

MOUNTING FEATURES

- Installation directly to ventilation shaft.
- Flexible air ducts may be used in case of remote location of the ventilation shaft.
- Wall mounting with screws.
- Suitable for ceiling mounting also.


OPTIONS

- Pull-cord switch Timer
- Time delay range from 2 to 30 min
- Humidity
- Humidity level range from 60 to 90%
 - Time delay range from 2 to 30 min

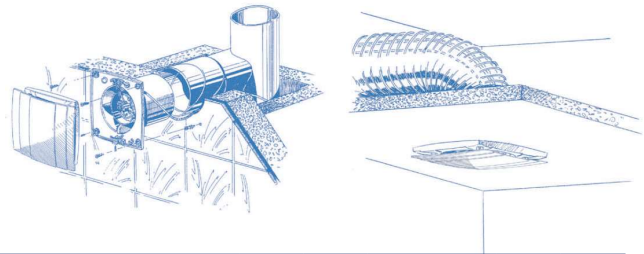

Type	Dimensions [mm]					
	a	a1	b	c	d	e
Quatro 100	171	151	108	128	100	32
Quatro 125	201	178	113	136	125	35
Quatro 150	236	207	165	157	150	38

SPECIFICATIONS

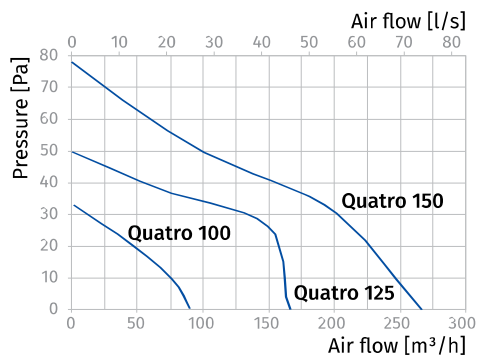

Parameters	Quatro 100	Quatro 125	Quatro 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Air capacity [m³/h]	88	167	265
Noise level [dB(A) 3m]	33	34	37
RPM [min ⁻¹]	2300	2400	2400



INSTALLATION EXAMPLES

